

MBR20200FLCT

20.0AmpLOW VF Schottky Barrier Rectifiers

ITO-220AB

Features

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Construction utilizes void-free molded plastic technique
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed
250°C/10 seconds at terminals


Mechanical Data

Terminals : Pure tin plated leads, solderable per MIL-STD-202, Method 208 guaranteed

Polarity : Polarity symbol marking on body

Mounting torque: 5 in- lbs, max

Weight: 1.91 grams

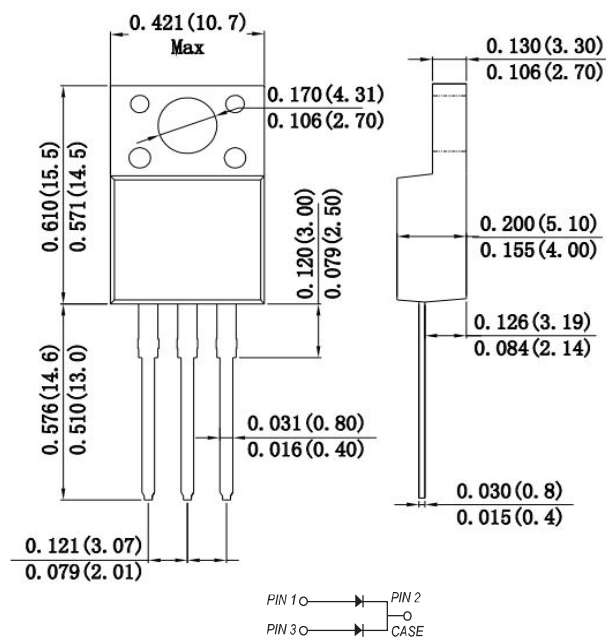

Dimensions in inches and (millimeters)

Maximum Ratings And Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified. Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

Parameter	SYMBOLS	MBR 20200FLCT	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	200	V
Maximum RMS voltage	V_{RMS}	140	V
Maximum DC blocking voltage	V_{DC}	200	V
Maximum average forward rectified current at $T_C=95^\circ\text{C}$ (See Fig.1)	$I_{(AV)}$	20.0 10.0	A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	160.0	A
Peak Forward Voltage at 10.0A DC (Note1)	V_F	0.90	V
Maximum DC reverse current at rated DC blocking voltage	I_R	0.20 25.0	mA
Typical Thermal Resistance (Note2)	R_{qJC}	3.0	°C/W
Operating junction temperature range	T_J	-55 to +150	°C
Storage temperature range	T_{STG}	-55 to +175	°C

NOTES:1.300us pulse width,2% duty cycle.

2.Thermal resistance junction to case.

3.The typical data above is for reference only

Ratings And Characteristic Curves

MBR20200FLCT 20.0Amp LOW VF Schottky Barrier Rectifiers

FIG1:Io -Tc Curve

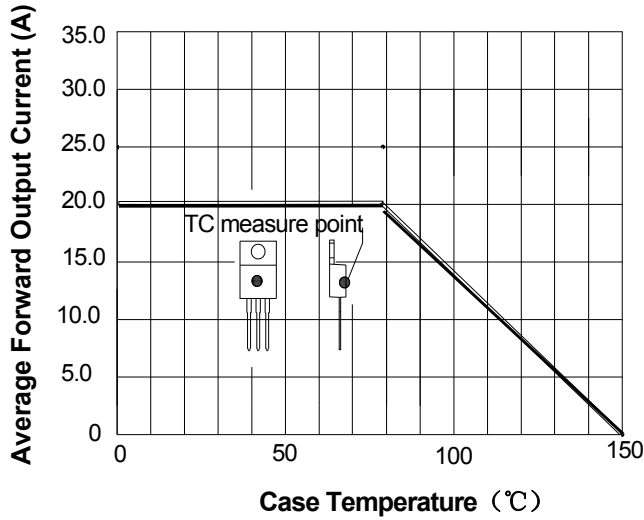


FIG2: Surge Forward Current Capability

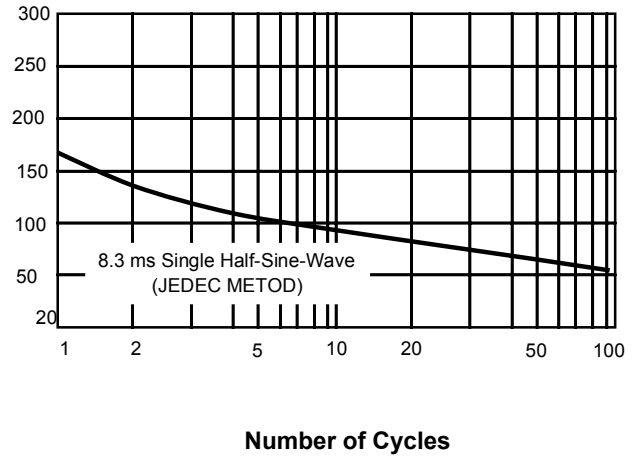


FIG3: Forward Voltage


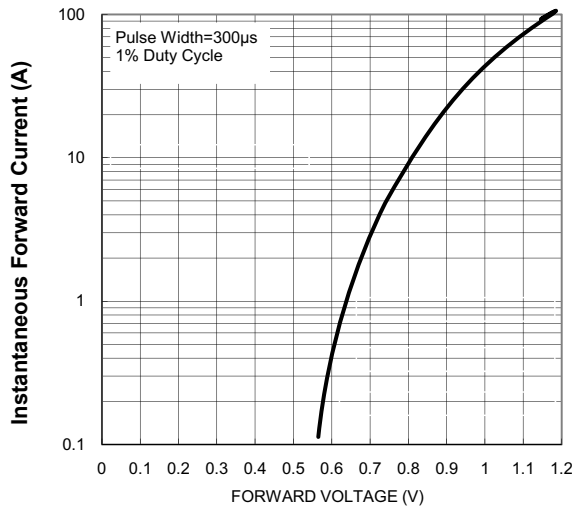


FIG4: Instantaneous Reverse Characteristics

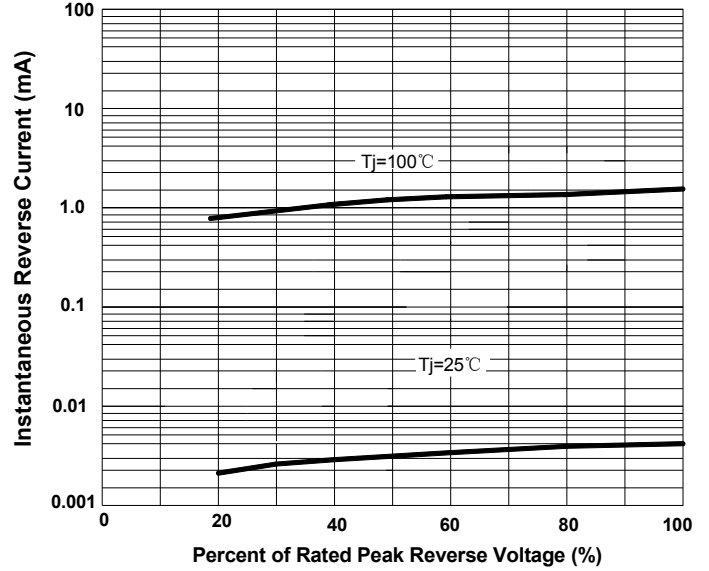

The curve graph is for reference only, can't be the basis for judgment