


MMBT4403 TRANSISTOR (PNP)

FEATURES

Switching transistor

MARKING : 2T

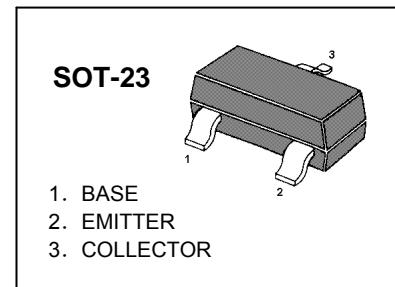

MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Units
V_{CBO}	Collector-Base Voltage	-40	V
V_{CEO}	Collector-Emitter Voltage	-40	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_c	Collector Current -Continuous	-0.6	A
P_c	Collector Power Dissipation	0.3	W
T_j	Junction Temperature	150	°C
T_{stg}	Storage Temperature	-55-150	°C

ELECTRICAL CHARACTERISTICS (Tamb=25°C unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	MAX	UNIT
Collector-base breakdown voltage	$V_{(BR)CBO}$	$I_C=-100\mu\text{A}, I_E=0$	-40		V
Collector-emitter breakdown voltage	$V_{(BR)CEO}$	$I_C= -1\text{mA}, I_B=0$	-40		V
Emitter-base breakdown voltage	$V_{(BR)EBO}$	$I_E=-100\mu\text{A}, I_C=0$	-5		V
Collector cut-off current	I_{CBO}	$V_{CB}=-35\text{V}, I_E=0$		-0.1	μA
Collector cut-off current	I_{CEO}	$V_{CE}=-35 \text{ V}, I_B=0$		-0.1	μA
Emitter cut-off current	I_{EBO}	$V_{EB}=-4\text{V}, I_C=0$		-0.1	μA
DC current gain	h_{FE}	$V_{CE}=-2\text{V}, I_C= -150\text{mA}$	100	300	
Collector-emitter saturation voltage	$V_{CE(\text{sat})}$	$I_C=-150\text{mA}, I_B=-15\text{mA}$		-0.4	V
Base-emitter saturation voltage	$V_{BE(\text{sat})}$	$I_C= -150\text{mA}, I_B=-15\text{mA}$		-0.95	V
Transition frequency	f_T	$V_{CE}= -10\text{V}, I_C= -20\text{mA}$ $f = 100\text{MHz}$	200		MHz

Typical Characteristics

MMBT4403

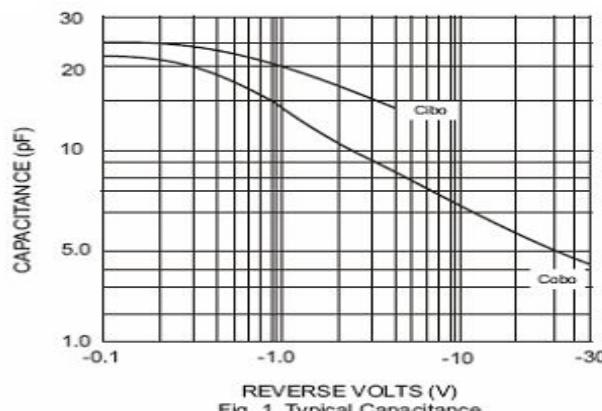


Fig. 1 Typical Capacitance

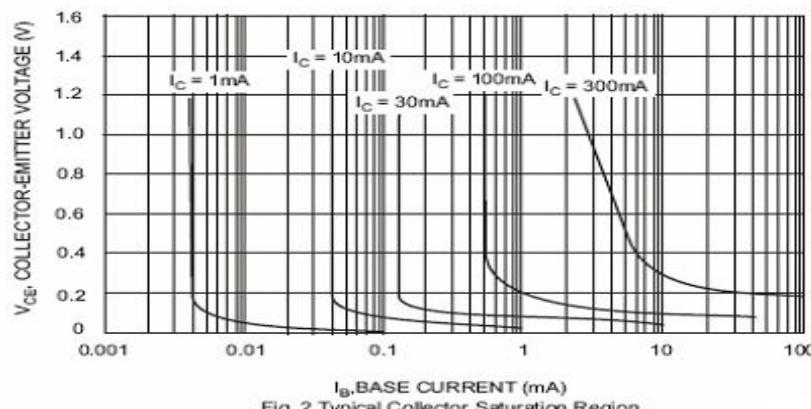


Fig. 2 Typical Collector Saturation Region

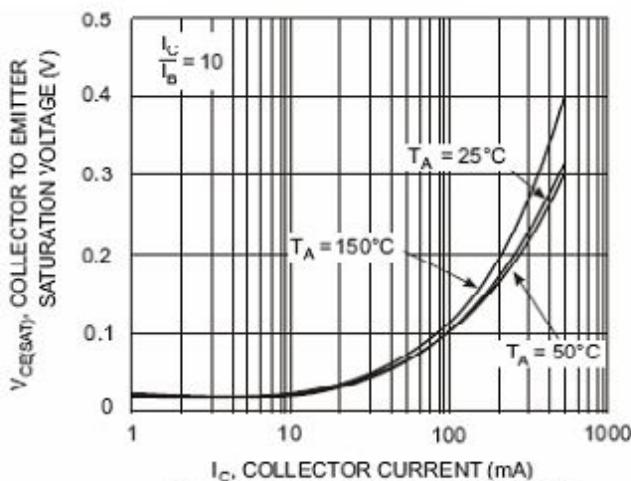


Fig. 3 Collector Emitter Saturation Voltage vs. Collector Current

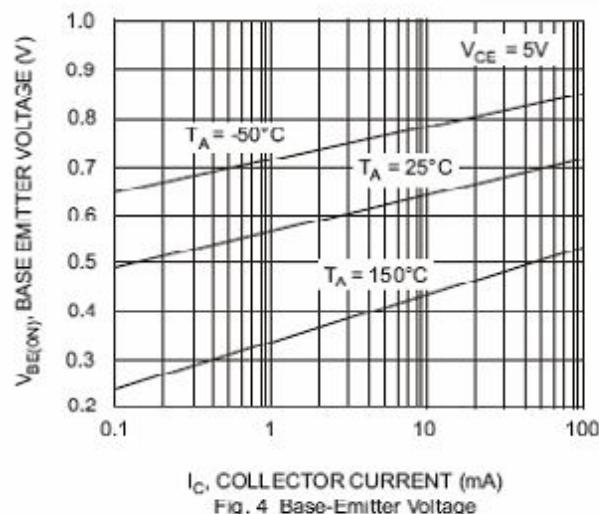


Fig. 4 Base-Emitter Voltage vs. Collector Current

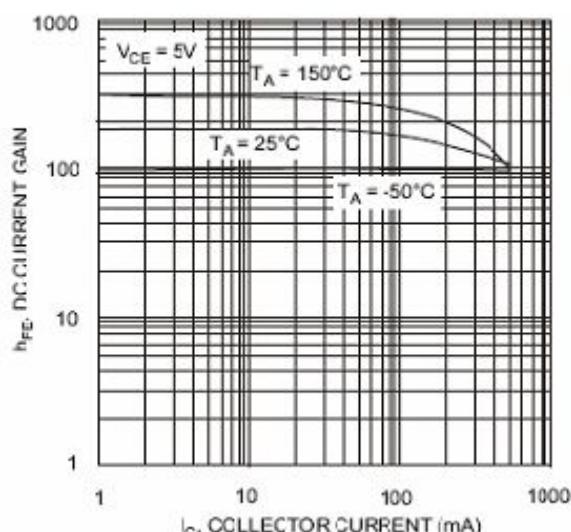


Fig. 5 DC Current Gain vs. Collector Current

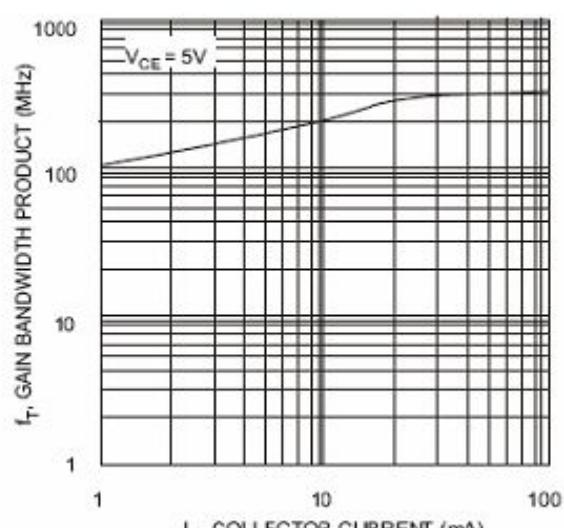


Fig. 6 Gain Bandwidth Product vs. Collector Current

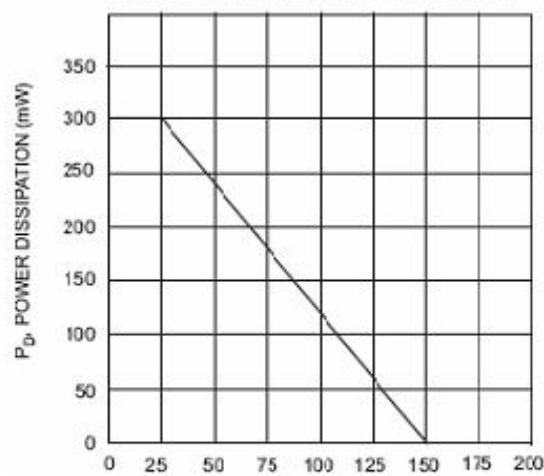
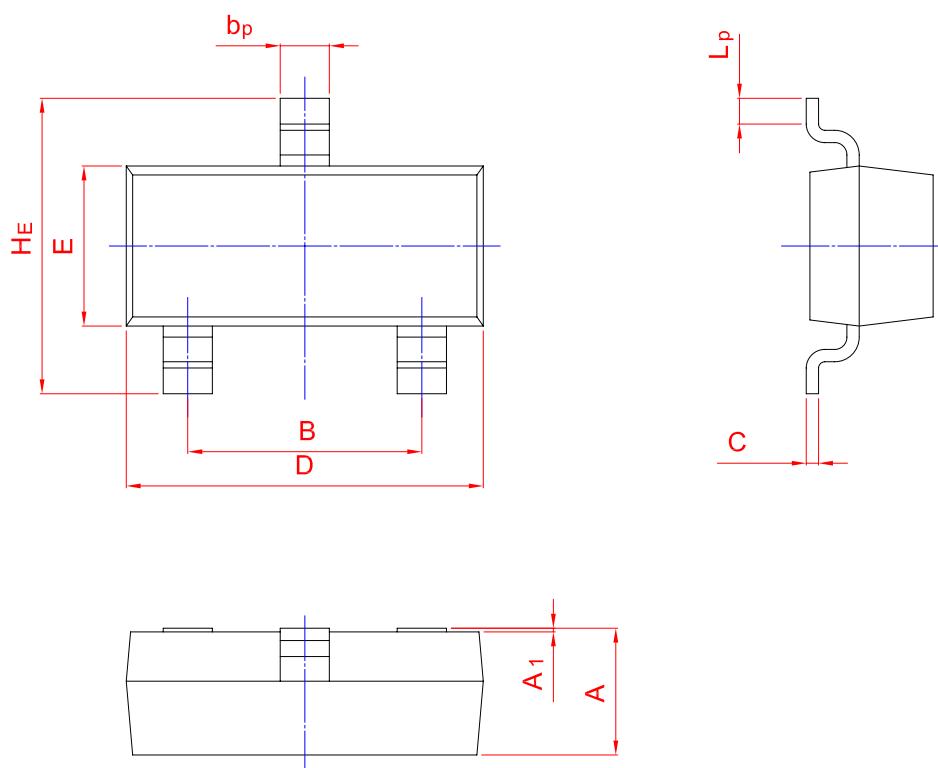


Fig. 7 Max Power Dissipation vs. Ambient Temperature

PACKAGE OUTLINE

Plastic surface mounted package; 3 leads

SOT-23

UNIT	A	B	b_p	C	D	E	H_E	A_1	L_p
mm	1.40 0.95	2.04 1.78	0.50 0.35	0.19 0.08	3.10 2.70	1.65 1.20	3.00 2.20	0.100 0.013	0.50 0.20